


ENGINEERING GRAPHICS WITH **AutoCAD[®] 2020**



JAMES D. BETHUNE

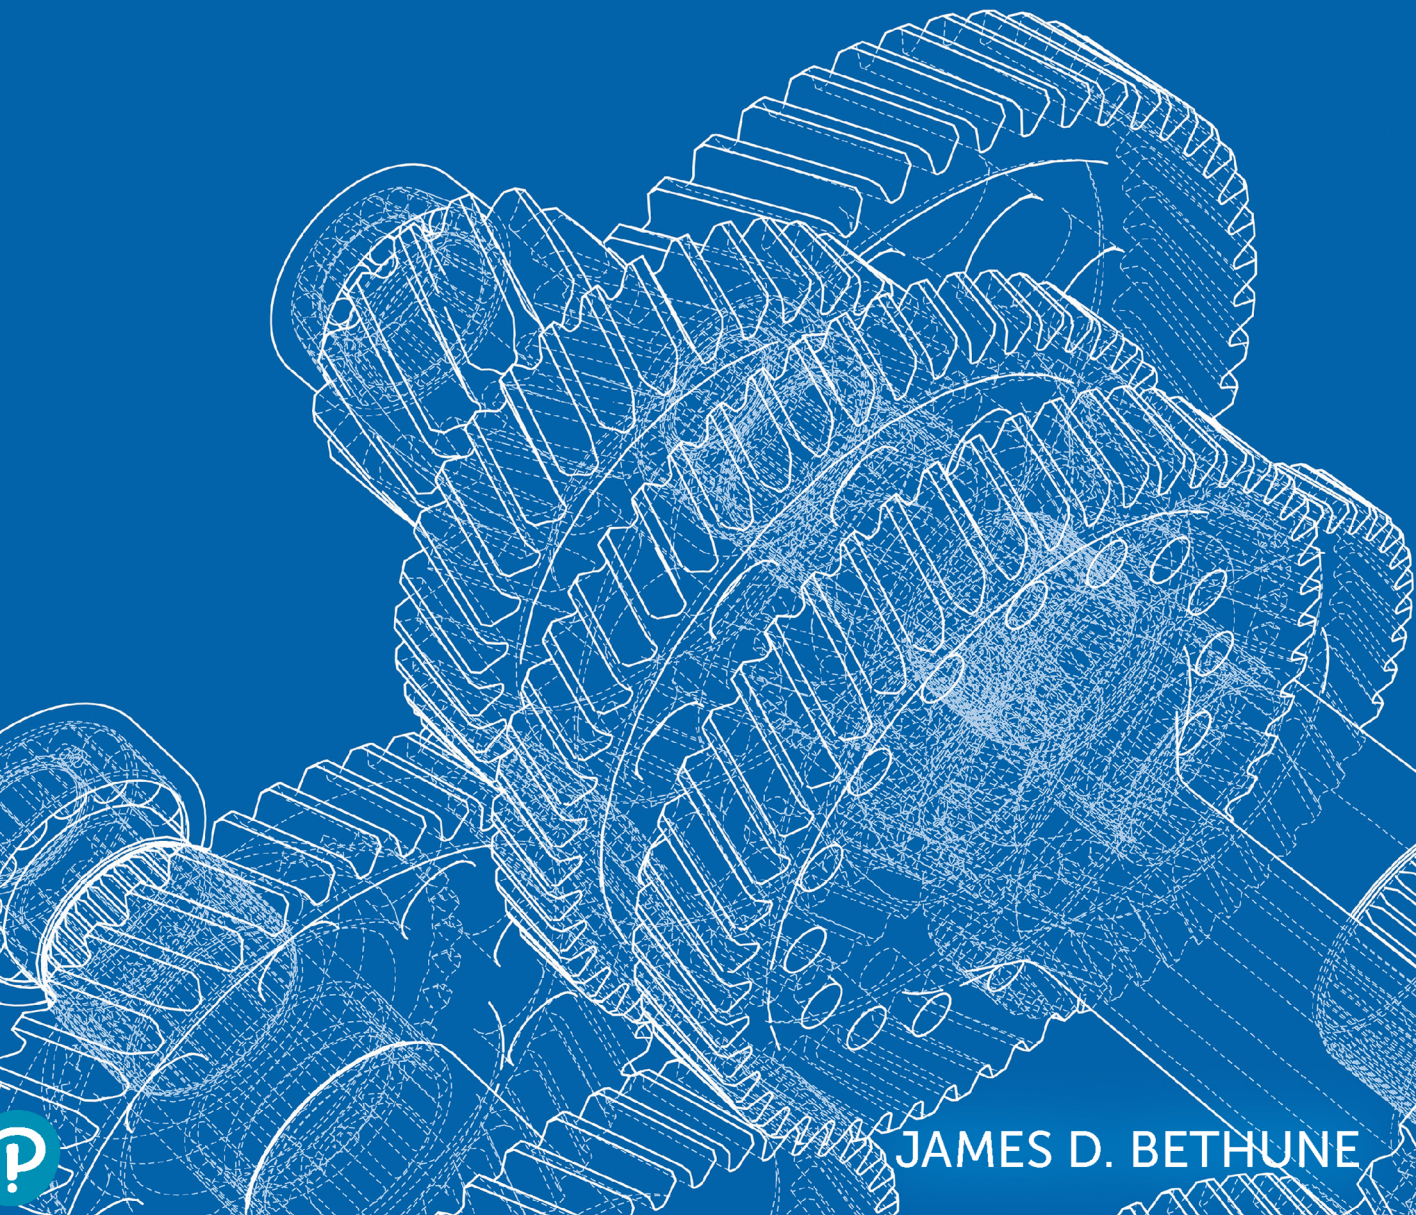

***Engineering Graphics
with AutoCAD® 2020***

This chapter has presented orthographic views using third-angle projections as defined by ANSI. However, there is so much international commerce happening today that you should be able to work in both conventions as you should be able to work in both inches and millimeters.

Figure 5-87 shows a three-dimensional model and three orthographic views created using third angle projection and three orthographic views created using first-angle projection. Note the differences and similarities. The front view in both projections is the same. The top views are the same but are in different locations. The third-angle projection presents a right-side view, while the first-angle projection presents a left-side view.

Figure 5-88 shows the drawing symbols for first- and third-angle projections. These symbols can be added to a drawing to help the reader understand which type of projection is being used. These symbols were included in the projections presented in Figure 5-87.

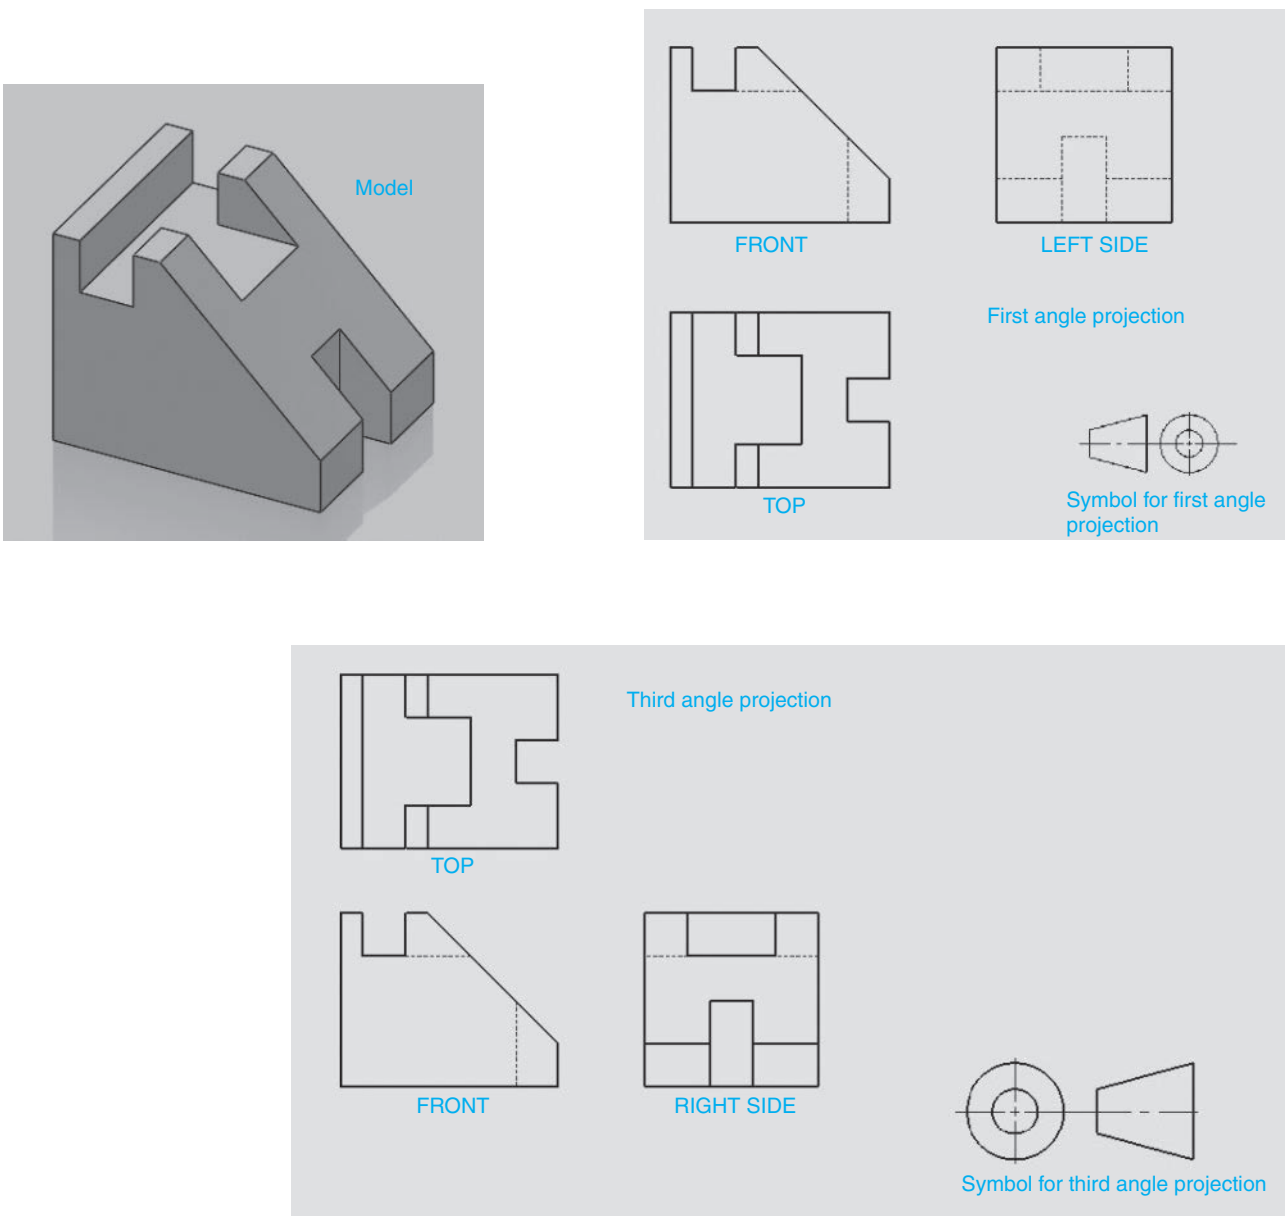


Figure 5-87

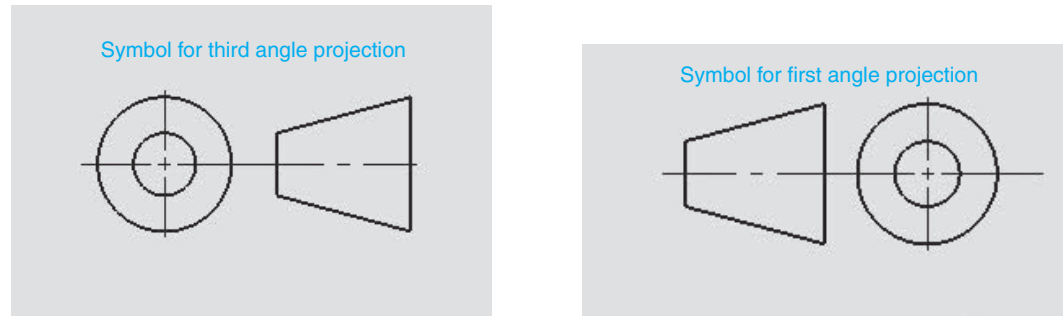


Figure 5-88

5-37 Third- and First-Angle Projections

Figure 5-89 shows an object with a front orthographic view and two side orthographic views: one created using third-angle projection and the other created using first-angle projection. For third-angle projections, the orthographic view is projected on a plane located between the viewer's position and the object. For first-angle projections, the orthographic view is projected on a plane located beyond the object. The front and top views for third- and first-angle projections appear the same, but they are located in a different position relative to the front view.

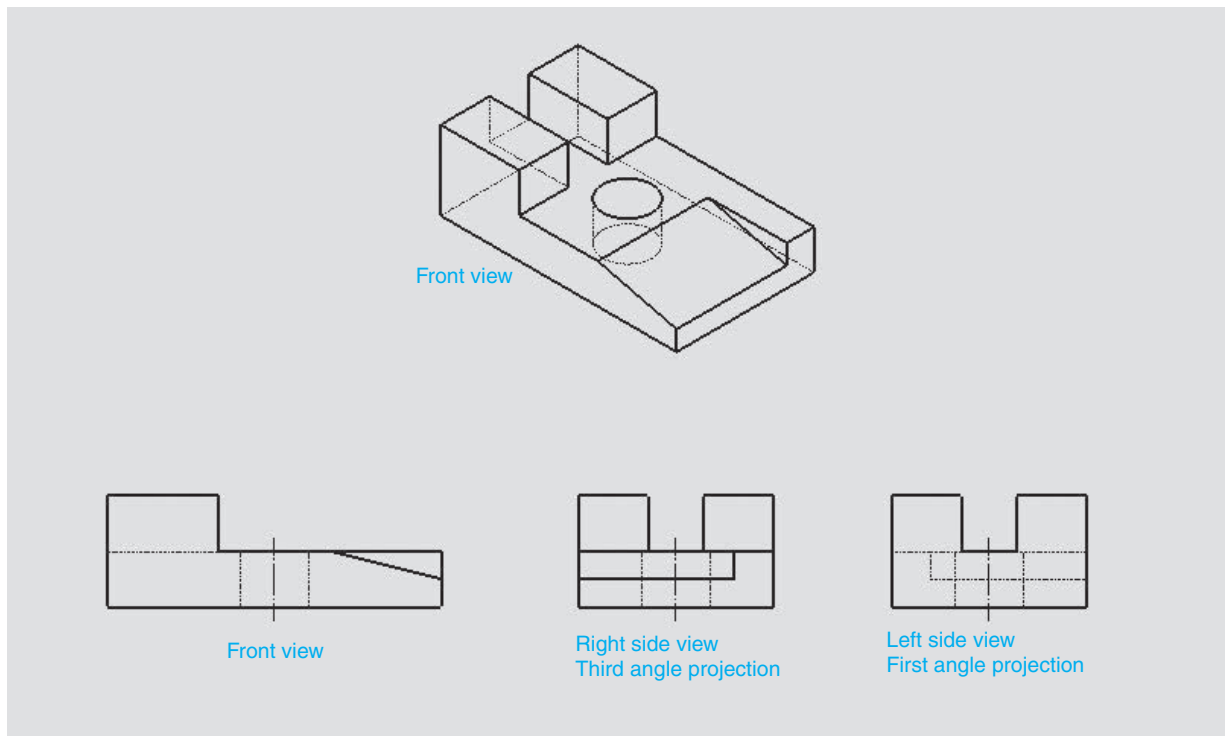


Figure 5-89

The side orthographic views are different for third- and first-angle projections. Third angle projections use a right-side view located to the right of the object. First-angle projections use a left-side view located to the right of the object. Figures 5-90 and 5-91 show the two different side-view projections for the same object. For third-angle projection, the viewer is located on the right side of the object and creates the side orthographic view on a plane located between the view position and the object. The viewer looks directly at the object. For first-angle projection, the viewer is located on the left side of the object and creates the side orthographic view on a plane located beyond the object. The viewer looks through the object.

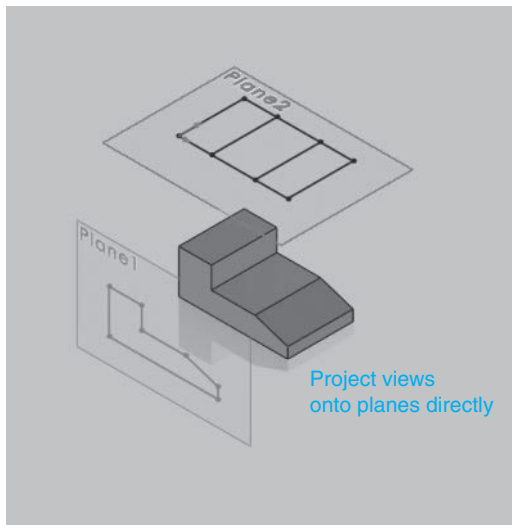


Figure 5-90

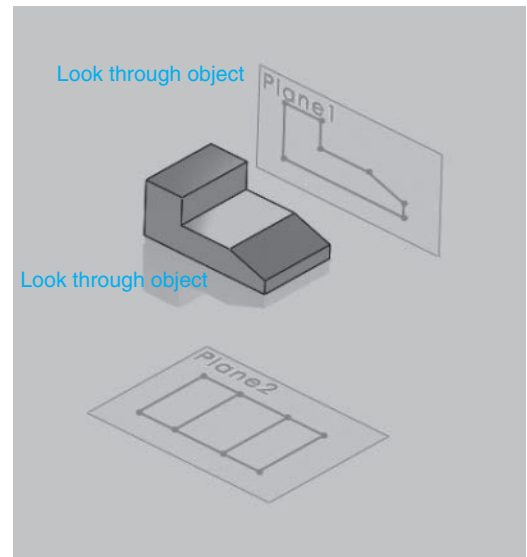


Figure 5-91


To help understand the difference between side-view orientations for third- and first-angle projections, locate your right hand with the heel facing down and the thumb facing up. Rotate your hand so that the palm is facing up—this is the third-angle projection orientation. Return to the thumb up position. Rotate your hand so that the palm is down—this is the first-angle view orientation.

5-38 EXERCISE PROBLEMS

Draw a front, top, and right-side orthographic view of each of the objects in Exercise Problems EX5-1 through EX5-94. Do not include dimensions.


EX5-1 Inches

L-BLOCK

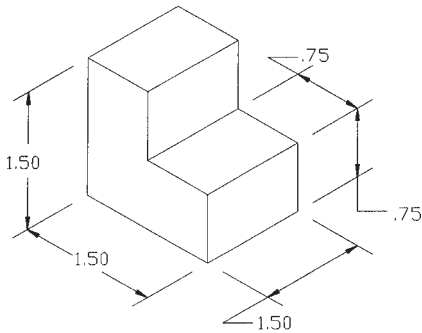


EX5-2 Millimeters

STEP BLOCK

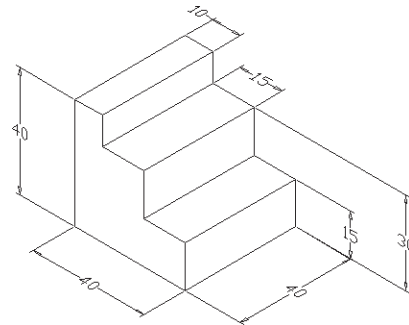


EX5-3 Millimeters

STEPPER

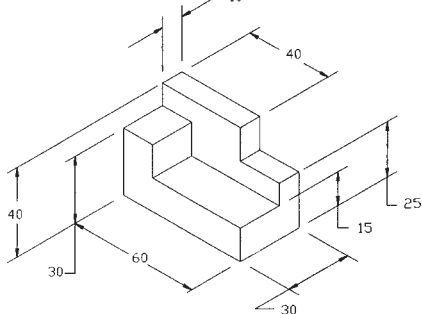


EX5-4 Inches

PILLAR STOP

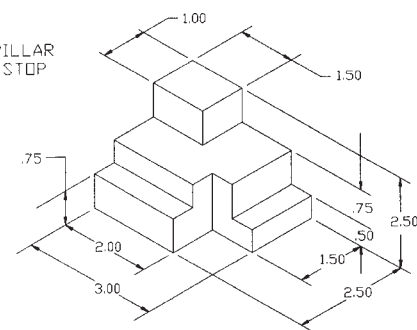


EX5-5 Millimeters

SPLIT BLOCK

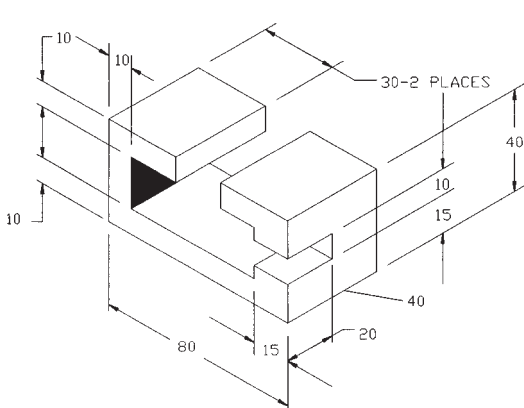


EX5-6 Millimeters


SQUARE CLIP

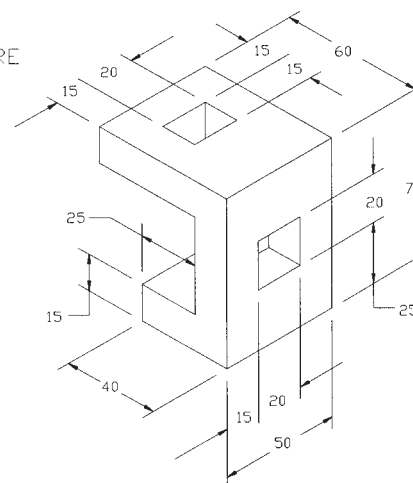


EX5-7 Millimeters

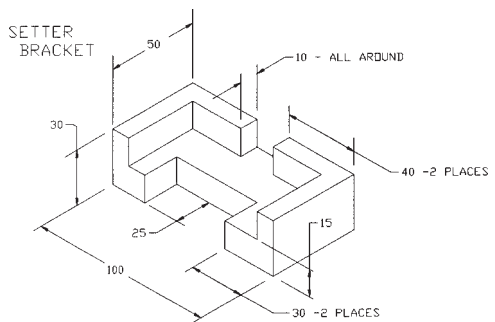


EX5-8 Millimeters

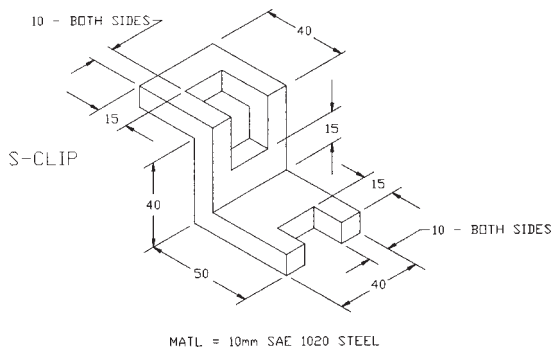


EX5-9 Inches

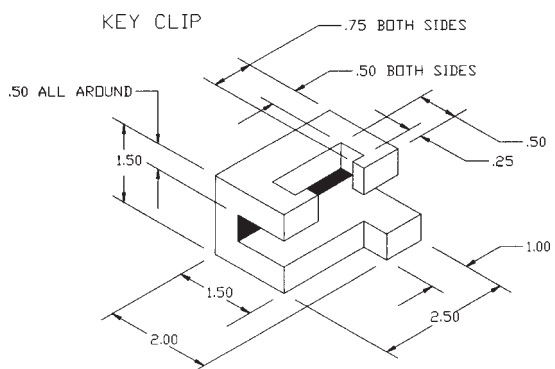


EX5-10 Millimeters

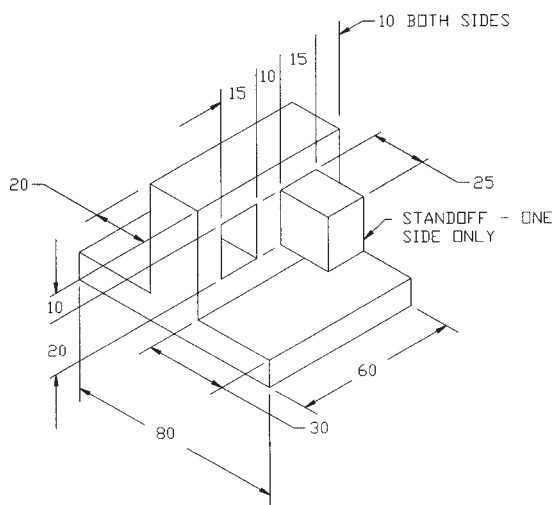

EX5-11 Millimeters

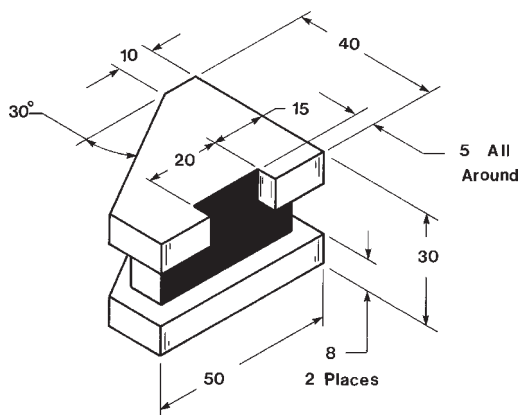

EX5-12 Inches

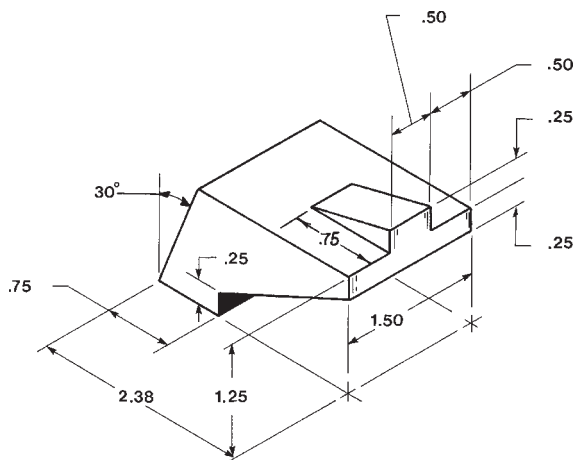

Isometric view of a mechanical part. Dimensions include: 15, 20, 22, 10, 51, 20, 34, 25, 50, 60, and R 18. A label "8-2 PLACES" points to a specific feature.

[illegible][illegible]

An isometric drawing of a mechanical part. The part has a base plate that is 70 units wide and 50 units deep. On the left side, there is a vertical plate 15 units wide and 55 units high. A sloped plate rises from the base at a 30-degree angle, with a horizontal run of 15 units and a vertical rise of 23 units. The top surface of this sloped plate is 25 units wide. On the right side, there is a vertical plate 15 units wide and 15 units high, and a smaller rectangular block 15 units wide and 22 units high. The sloped plate on the right rises at a 45-degree angle. Hidden edges are shown with dashed lines.

Isometric view of a mechanical part. Dimensions are indicated: 80 (total length), 5 (thickness of the left flange), 20-Both Ends (width of the flanges), 30 (height of the flanges), 10 (width of the central slot), 35 (total width), 10 (width of the base), 20 (height of the base), and 5 (thickness of the base).

An isometric drawing of a mechanical component. The part has a base plate with a total width of 70 and a depth of 60. On the left side, there is a vertical wall with a height of 22 and a thickness of 10. A sloped surface rises from the base, with a horizontal run of 20 and a vertical rise of 15. The top surface of this slope is 36 wide. A vertical wall of height 6 and thickness 7 is located at the top right of this slope. The main body of the part has a width of 20 at the front and tapers to a width of 25 at the back. A small rectangular feature is located on the front face, with a width of 8 and a height of 11. The overall length of the part is 60.